

PAPER • OPEN ACCESS

Automatic decision-making system for the desalinization of water for irrigation

To cite this article: R Gaziyeva *et al* 2020 *IOP Conf. Ser.: Earth Environ. Sci.* **614** 012113

View the [article online](#) for updates and enhancements.

Automatic decision-making system for the desalinization of water for irrigation

R Gaziyeva¹, E Ozodov^{1*}, E Bozorov¹, and A Nigmatov¹

¹Department of Automation and Control of Technology Process, Tashkent Institute of Irrigation and Agricultural Mechanization Engineers, 39 Koriy-Niyoziy, 100000 Tashkent, Uzbekistan

*Email: ezoz-1995@mail.ru

Abstract. The high salinity of water negatively affects soil fertility up to yield loss. In regions with high salinity, unorthodox methods and devices are used to lower the level of mineralization. This article discusses the use of an automatic decision-making system for a device to lower the level of mineralization by diffusion mixing. Construction able to filter water to irrigation rates up to 3 grams per liter and extent the operating period of reverse osmosis. The article provides a detailed description algorithm of a program for automatic control of the water purification process based on the Atmega 328 processor.

1. Introduction

The primary aim of irrigation is to provide a crop with adequate and timely amounts of water, thus avoiding yield loss caused by extended periods of water stress during stages of crop growth that are sensitive to water shortages. However, during repeated irrigations, the salts in the irrigation water can accumulate in the soil, reducing water available to the crop and hastening the onset of a water shortage. Understanding how this occurs will help suggest ways to counter the effect and reduce the probability of a loss in yield [1].

Desalinated water is being used for irrigation purposes in many places around the world, where the available water source is too saline to be used. Such water sources may include groundwater, sea water and sometimes surface water from lakes [2]. Water salinity is a major problem for agriculture. Saline water contains high concentrations of salts, which crops might not tolerate. The source of the salts in water is the surrounding rocks, e.g. the mineralogy of the aquifer. Therefore, surface water is usually less salty than groundwater, which is surrounded by rocks. Oceans are salty because when water evaporates, the salts remain and accumulate [3].

Groundwater may contain high concentrations of ions such as sodium, chlorides, sulphate, bicarbonates, calcium, and magnesium. It may also contain trace elements such as boron, iron, manganese and fluoride, which may be present at relatively low concentrations, but might become toxic to the plant if their concentrations exceed certain thresholds (such thresholds are usually crop-specific) [4].



Soil salinity is a term that includes saline, sodium and alkaline soils, respectively defined as (a) high salt concentration, (b) high sodium cation (Na^+) concentration, and (c) high pH often due to high CO_3^{2-} concentration - in the soil. Salinization of soils leads to a change or even disruption of the natural biological, biochemical, hydrological and erosion Cycles of the Earth. Thus, high levels of salinity can lead to the loss of emerging soil resources, goods and services that affect agricultural production and environmental health, which will eventually develop into a sociocultural and human health problem that impedes economic and general well-being [5].

Desalination is a water treatment process in which salts are removed from water. There are various methods of desalination, of which, the main method used today is Reverse Osmosis.

In reverse osmosis, water is pushed through semi-permeable membranes, using pressure. The salts do not pass through the membrane, while water molecules do.

In Uzbekistan, the economic and demographic burden on land, especially for agricultural purposes, is increasing from year to year. Of the 17.8 million hectares representing the total agricultural land in the republic, only 25% is arable land [6]. Over the past 15 years, the area of agricultural land has decreased by more than 5%, and per capita - by 22% [7].

Over the past 30 years, the area of irrigated land per capita has decreased by about 25%, i.e. from 0.23 ha to 0.16 ha. Naturally, the above data indicate that farmers are reduced to flat out for work, and thereby their incomes are also mourned. The process of anthropogenic desertification, that is, associated with human activity. Soil erosion and soil salinization processes are continuing. Over 3 million hectares of land suffer from wind and water erosion - for the season the average loss of the fertile layer, for this reason, reaches 80 tons per hectare [8].

To eliminate this kind of problem, different methods and devices are used to reduce the salt content of water, one of which is diffusion mixing devices. This type of lowering the salinity of the water is interesting in that it is portable.

But it is worth noting that it requires local management, which does not make it possible to use it for large areas of land with small working personnel.

2. Materials and Methods

2.1 Object of research

Depending on the type of plant, a high concentration of salt can cause loss of yield and they are quality agricultural products.

Depending on the type of crop, there are some types of water purification for irrigating the plant.

The most effective option for lowering the level of water mineralization is the installation of reverse osmosis. This device is a mechanical cleaning using a membrane; at high pressure, the membrane purifies water from various salts. It is worth noting that this device is very high quality purified water and is used for water treatment in pharmaceuticals and food industries.

For agriculture, this device can be used in two methods for economic reasons.

1. Plain water can be mixed with untreated water.
2. Continuous connection of the filter for irrigation [9].

We focus on construction for mixing for system which has two operating modes, the upper mode is a mode in which only reverse osmosis is activated and is used to reduce salinity to drinking water standards.

The lower mode is the diffusion mixing mode. A tank is installed in this part of the structure, where the pipes are connected from the source, from where salted water comes from and from reverse osmosis, from where filtered water comes from. The proportions of the water in the tank are measured using a conductivity sensor.

The conductometric sensor determines the operation of switching valves and thereby makes it possible to control the salt level inside the tank. With a certain amount of water in the tanks, the lower valve automatically activates, which delivers this water to the irrigated place. The ratio of salt and filtered

water is compiled according to a given sketch of the microcontroller of the system. Consists of determining the level of salt and on the basis of this indicator the volume of work is established as the proportion of salt and drinking water. The signal of the conductometric sensor installed on the source is compared with the specified parameters of the controller and the volume range is determined by the specified value (see Figure 1) [10].

The principle of operation of the construction is that the electromagnetic control valve V_1 distributes water for cleaning using reverse osmosis, valve V_2 is used to supply purified water to the capsule, valve V_3 is used to supply mixed water for irrigation. The valve operating time and the volume of water flow distribution for cleaning and for direct transfer to the capsule depending on the salinity of the water source. The data that is transmitted from the 1st sensor goes to the controller, and after that the controller, based on the built-in algorithm, sets the operating time of the on-off valves. The level of reverse osmosis load depends on the salinity of the water source and thus it is possible to extend the level of operation of the reverse osmosis by creating an individual regime depending on the degree of salinity of the water.

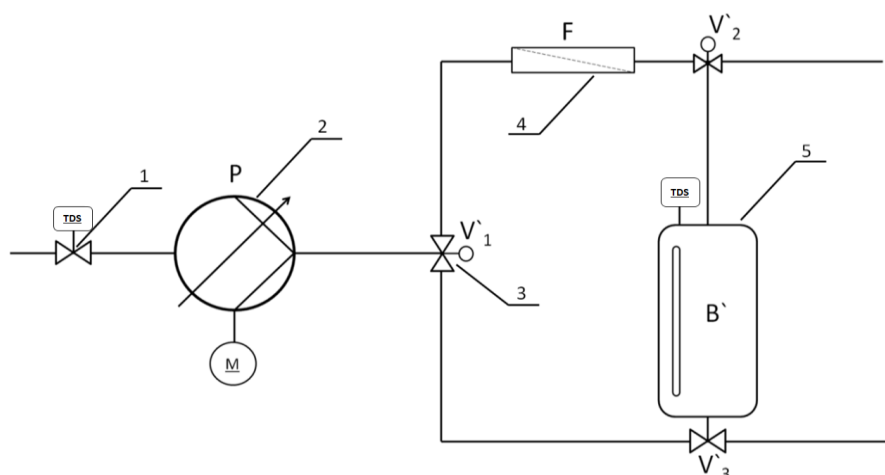


Figure 1. Scheme of construction of diffusion mixing system: 1-conductivity sensor; 2-pump unit; 3-two position solenoid valve; 4- reverse osmosis; 5- tank of diffusion mixer

The main work of liquid separation is carried out by means of distribution by a two-position valve in a certain time interval. The interval and duration of the valves depends on the performance of the source sensors and the capsule of the diffusion mixing [10].

2.2 Algorithm and method of control

All this work will control by automation system which make set autonomy work. All work will base on decisions making system on base of program for Atmega 328 microprocessor.

Algorithm of work this system base on the equation-1 composition of the source water from the first sensor is known, and the required final concentration of irrigation water to be obtained is known. It is required to obtain it by adding pure water from a filter to the initial saltwater containing the required substance. According to the formula below, we can get the amount of pure water needed for the initial part.

$$V_2 = \frac{C_1 V_1 - C V_1}{C - C_2} \quad (1)$$

In (1), the concentration of the substance in the first component of the mixture C_1 , the volume of the first component of the mixture V_1 , the concentration of the substance in the second component of the mixture C_2 , the final, the required concentration of the substance C [11].

Switching on and off of two-position valves is described on the basis of scheme number two. Confirming the level of the content above or below the specified norm the water components transfers it for filtration or directly in diffusion mixing capsules (see Figure 2).

The algorithm of the technological process, and its automation is carried out in this way, at the beginning of the process, the initial data from the sensors is taken initially, and then they are compared using equation 1, if the water level exceeds this standard for irrigation, which is 3 g per liter, then the water is sent for cleaning (to say that the total volume in the distribution of water is precisely the proportion inside the capsule based on the salt content inside the source). The main logic of the system is to bring the content inside the capsule up to 3 grams, regardless of the volume of salt content inside the source, if the salt content inside the source is high, then the operating time of reverse osmosis increases significantly and the distribution valve mainly operates in the purification mode.

To implement the work of the equation and the block diagram will be using a circuit architecture based on the Arduino line. The logic equation will be uploaded to the ATmega 328 microprocessor as a result of which the microprocessor solution will be transmitted to the executive body in the form of a relay module. Relay modules will transmit voltage to the two-position solenoid valve (see Figure 3) [12].

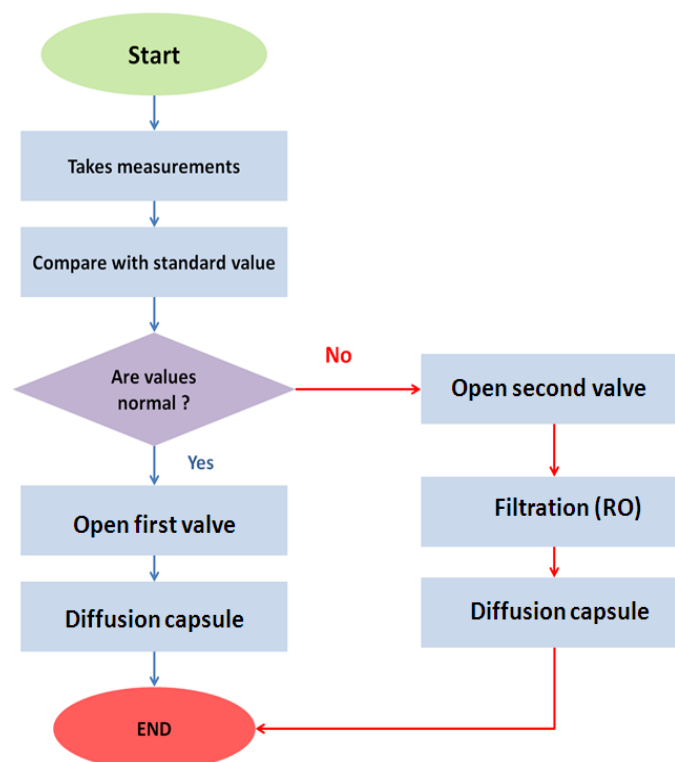


Figure 2. Block scheme of decision making system

To use the remote control, a GSM SIM900D module was added to the design. During local operation, an LED display is used to determine the level of content in the capsule. A TDS sensor is used as a measuring device [13]. The GSM module is used to notify about the state of the water inside the capsule, the interval is 13 seconds from the activation of second TDS sensor.

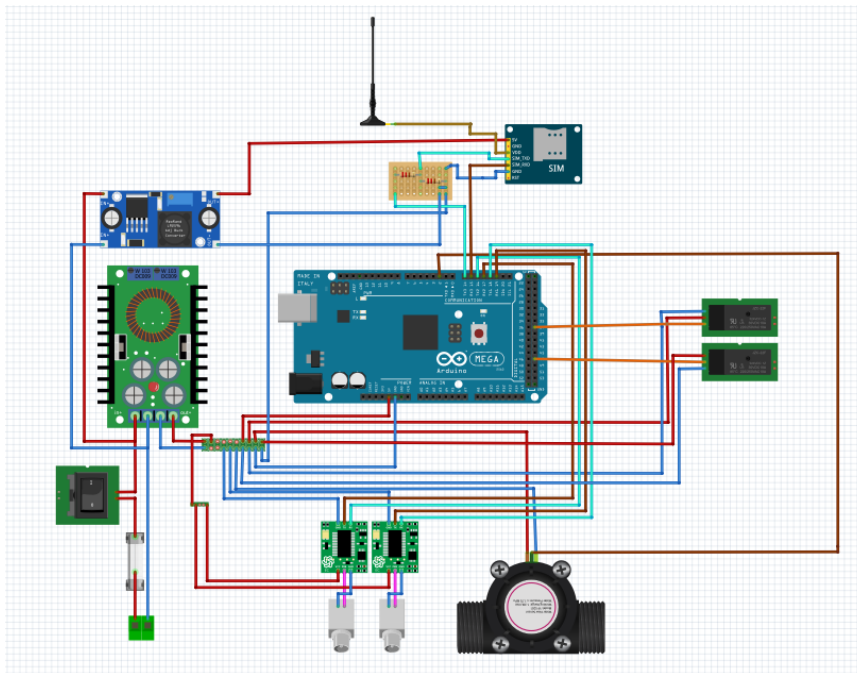


Figure 3. Circuit board of the automatic control system

3. Results and Discussions

Based on the above data, a batch mixing prototype was constructed (see Figure 3). The volume of the capsule for mixing is 300 ml. TDS sensor is used to determine the salt content of the source and the mixing capsule. Considering the fact that the water concentration is based on the volume and operating time of the valves, an electrode type water level sensor was installed in the inner part of the capsule, can be seen (see Figure 4).

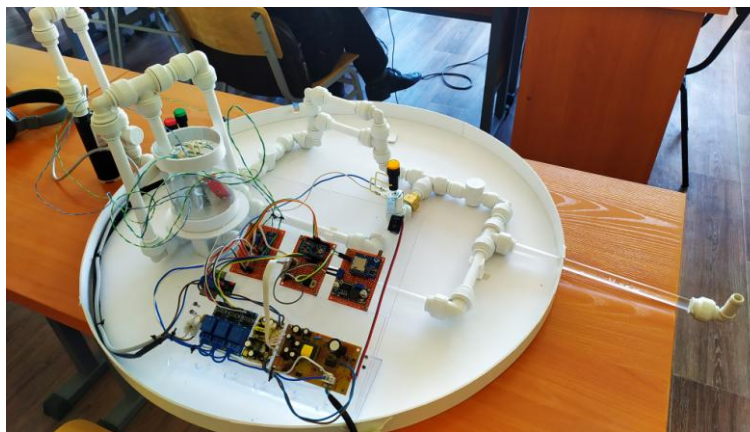


Figure 4. Experimental prototype

This experimental construction was created on the basis of the aforementioned schematic diagram of Figure 1.

Solenoid manifolds DN10 SM88632 are used to control the water flow. The volume of water for filtration depends on the salinity of the water, the opening and closing times of the valve are determined according to salinity of water in source.

During the experiment, the ratio of the valve operation time for filtration with the volume of salt in water was determined, which are presented in Table 1.

Table 1. Parameters of work solenoid manifolds according to salt value

Water classification	Total dissolved solids	Opening time of valve v_1 to filter
Brackish water:	10,000 mg/L	25 seconds
Saline water:	35,000 mg/L	45 seconds
Hypersaline	45,000 mg/L	60 seconds

A process control board has been designed on the architecture which shown on Figure 3. When the device is working, it shows that 0.98 grams of salt are in the liquid, which is the normative indicator for irrigation [14].

To determine the automatic operation of solenoid headers and valves based on time limits with the ratio of the salinity of water, a control board was created based on Figure 3.

To implement this architecture, elements similar to the scheme were used in the control board which presented in Figure 5.

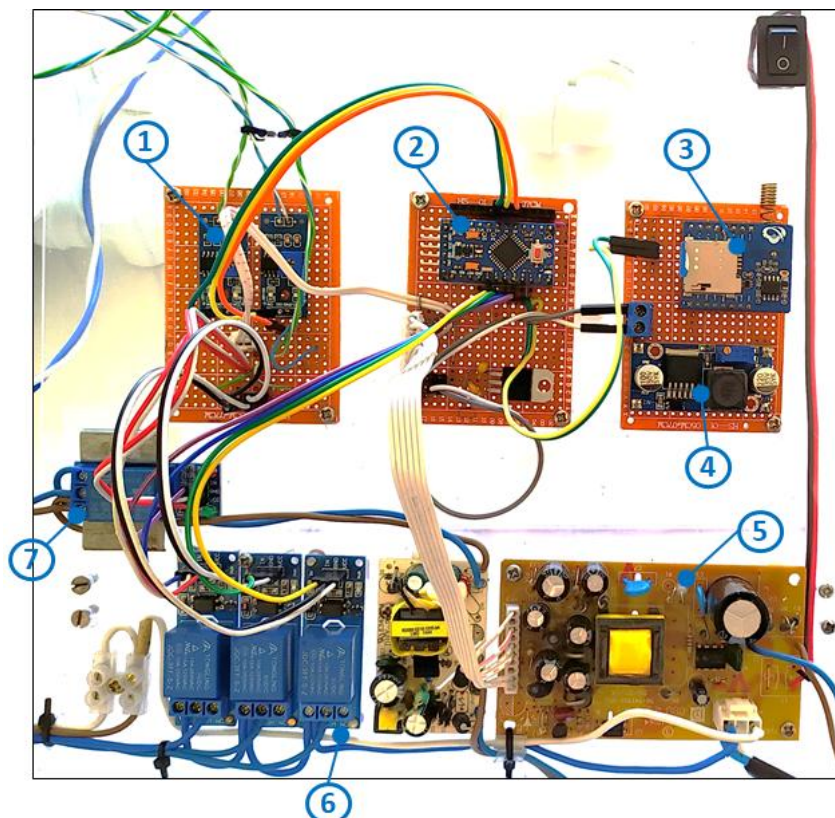


Figure 5. The architecture of the scheme of control: 1-Register for the input module 74hc165, 2-ATmega 328U microprocessor, 3- GSM module THINK IOT-G6, 4-Inverter amplifier ULN 2003 A, 5- power supply(24 V), 6 -Intermediate relay SONGLE SRD-05VDC, 7-Relay module /AVR

4. Conclusions

1. To carry out the cleaning process in this structure, the place of water accumulation must be predetermined. Valve run times are based on the total tank volume and the salinity of the water. If the salinity of the water is more than 45 grams per liter, then the operation of the system will be 100% based only on the work of reverse osmosis.
2. As feedback, a second TDS sensor inside the capsule used for notifies about the quality of the mixed water using the terminated GSM module. This variation of the feedback makes it possible to make monitoring remotely if it was illuminated to select the appropriate operation for the device to work.
3. The construction gives the possibility to the exploitation efficiency of the reverse osmosis filter increases by 13%, which allows farmers to use this technology longer.
4. The volume of untreated water is directly related to the level of salinity of the water.

References

- [1] Vlotman WF 2020 *Irrig. Drain.* **2** 218–229.
- [2] Ayers RS et al 1985 *Water quality for agriculture* 145-149.
- [3] Minhas PS 2020 *Agric. Water Management* **1** 227.
- [4] Russo D, Kurtzman D 2019 *Water* **11** 687.
- [5] Rashid M, Bhatti HM, Nadeem MY, Gill MR 1993 Use of saline water for crop production *Towards the rational use of high salinity tolerant plants* eds Lieth H, Al Masom AA (Dordrecht: Springer) chapter 2 pp 157–169.
- [6] Phogat V 2020 *Agriculture Water Management* **1** 237.
- [7] Charyev RR, Ismailova AI, Mirzaev 2017 *Gr Bulletin Of Orenburg State University* **6** 78–80.
- [8] Abdurakhmanov MA, Rakhimov YT 2017 *The Territory of Science* **4** 37-40.
- [9] Phogat V, Mallants D, Cox JW, Šimůnek J, Oliver DP, Awad J 2020 *Agricultural Water Management* **227** 105845.
- [10] Gazieva R, Ozodov E 2019 *ICISCT 2019* 78-81.
- [11] Bharti A, Kundu D, Rabari D, Banerjee T 2017 *Phase Equilibria in Ionic Liquid Facilitated Liquid-Liquid Extractions*, CRC Press, Boca Raton.
- [12] Senpinar A 2019 *Int. J. Environ. Sci. Technol.* **16** 5185–5196.
- [13] Yasin HM, Zeebaree SR, Zebari IM 2019 *4th Scientific International Conference Najaf (SICN)*, Al-Najef, Iraq, 109-114.
- [14] Liu A, Qu Z, Nachshon U. 2020 *Agric. Water Manag.* **234** 106118.