



RECOMMENDATIONS FOR CHOOSING THE OPTIMAL PARAMETERS OF SEDIMENTATION TANKS FOR THE DRIP IRRIGATION SYSTEM OF FARMS IRRIGATED FROM THE AMUDARYA RIVER

Asror Yangiev

D. Sc. Professor, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"
National research University

Shokhrukh Azizov

Trainee Researcher, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"
National research University

Sherzod Panjiev, Ph.D

Student, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"
National research University

Abstract: This article presents the results of field studies on the study of the process of sediment settling in the settling tanks of the drip irrigation system, carried out on farms in the Bukhara, Kagan, Peshku and Ramitan districts of the Bukhara region, which are supplied with water from the Amudarya River. Calculation of the process of settling sediments in sedimentation tanks was carried out according to the method of A.G.Khachatryan and a graph of the relationship between the length of the sedimentation tank and the degree of sediment clarification was determined. As a result, recommendations have been developed to substantiate the optimal parameters of the dampers for any natural conditions.

Key words: drip irrigation, sump (cooling pool), sedimentation, droppers, membrane, gate, bathometer, sump chamber.

Introduction.

Resolution of the President of the Republic of Uzbekistan dated October 25, 2019 No PP-4499 "On measures to expand mechanisms to encourage the implementation of water-saving technologies in agriculture" states the need for special research in the field of more efficient use of drip irrigation technology [1, 2, 3, 4]. The recommended dimensions for the construction of a water treatment plant on the area of 20 hectares of cotton fields of farms receiving water from the Amudarya are as follows [7]: the average turbidity of water in the irrigation network receiving water from the Amu-Bukhara canal is 2-3 kg/m³ and the average fraction of turbid particles in it is 0.25-1.1 mm, if the pump unit has a capacity of 315 m³/h punctuation distance is at least 25 m. The settling basin should consist of at least two chambers. According to calculations, the total length of the settling basin will be 41 m, width 13 m, of which the length of the first chamber will be 25 m, depth 2.0 m, the length of the second chamber will be 16 m, depth 1.7 m. According to the above recommendations, the volume of water in one-time filled sumps (cooling pools) reaches 3-5 hectares, the irrigation norm for irrigating 20 hectares of land is 6 times. Therefore, it is important to develop recommendations to substantiate the optimal parameters of drip irrigation systems in farms receiving water from the Amudarya basin [5,6,11,12,13,14,15].

Method.

In the course of the research, field-observation methods and generally accepted methods in hydraulics, methods of comparing the results of experiments with hydraulic calculations were used.

Results.

Due to the turbidity of the Amudarya water flow, the size of the sediments in the drip irrigation system has not been improved, and the deposition of mud along their length is not fully ensured. Assuming a constant flow of water from the canals to the settling basin then, the mud in the built settling basin will not have time to fully sink, resulting in the release of turbid water from the system filters and pipe drips during field irrigation. Therefore, it is necessary to conduct research to improve the size of drip irrigation systems in farms receiving water from the Amudarya basin. Field research was conducted in drip systems installed in cotton fields in several districts of Bukhara region, which are supplied with water from the Amudarya River. A drip irrigation system has been installed at the Islam farm in Kagan district to irrigate 20 hectares of cotton fields (Figure 1). Water is supplied to the drip irrigation system from the plot canal through culverts. The system is built with a single chamber covered with a membrane, the dimensions of which are as follows:

$$b = 11 \text{ m}; \quad L = 18 \text{ m}; \quad h = 2,5 \text{ m}.$$

The sump (cooling pool) dimensions were designed according to initial recommendations [7]. It is known that the water in the canal of this farm is from the Amudarya basin system and the level of turbidity is high. Therefore, the flow turbidity is deposited in the designed settler and the distilled water is pumped to the drip irrigation system.



Figure 1. Drip irrigation system on the farm "Islam".

Using field experimental methods, turbidity samples were taken to determine the turbidity level of the flow according to the scheme below.

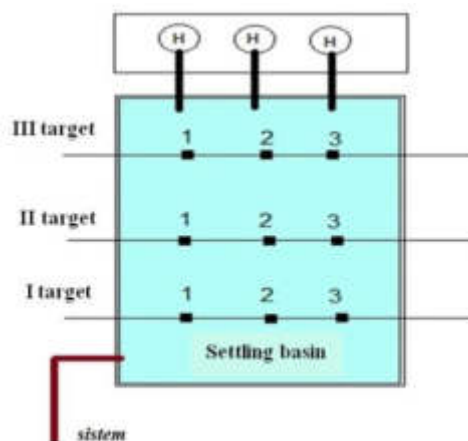


Figure 2. Drip irrigation system of "Islam" farm. The scheme of sampling of mud in the Settling basin.



Turbidity samples were taken from 3 wells along the length of the sediment, the beginning, middle and end of the sediment using a batometer. At the same time, samples were taken at a depth of 0.2h and 0.8h from 2 vertical storks along the length of each stork. The samples were analyzed in the soil laboratory of (TIAME-NRU) Bukhara Institute of Natural Resources Management (Uzbekistan).

The results are shown in Table 1 and Figure 2.

№	Names	Quantity (g/l)		Quantity (g/l)		Quantity (g/l)	
		0,2h	0,626	0,2h	0,661	0,2h	0,584
1.	I target	0,8h	0,647	0,8h	0,678	0,8h	0,623
		0,2h	0,382	0,2h	0,396	0,2h	0,361
2.	II target	0,8h	0,421	0,8h	0,453	0,8h	0,417
		0,2h	0,249	0,2h	0,251	0,2h	0,228
3.	III target	0,8h	0,264	0,8h	0,282	0,8h	0,234

Table 1. Analysis of the settling basin on the farm "Islam"

(The size of the settling basin is 18x11 meters)

Analysis of laboratory samples shows that the turbidity of the flow from the beginning of the settling tank (1st stage - 0,66 g/l) to the end (3rd stage - 0,26 g/l) decreased by 39%. Similar surveys were conducted on farms "Adizobod Erkin Mahmud" of Bukhara district, "Sharifbobo" of Romitan district, and "Fattoev" of Peshku district. The size of water intakes on these farms is the same as on the farm "Islam" in Kagan district and is designed to irrigate 20 hectares of cotton fields. Experimental analysis shows that the sedimentation rate of turbid sediments from the beginning to the end of the sediments in the conducted experimental sites is from 20% to 40%. If it is assumed that the water from the site canals is constantly flowing into the sediments, then the mud along the length of the sediments built has not yet completely subsided. As a result, during the field irrigation, turbid water was also released from the system filters and pipe drips, ie turbidity in the drips ranged from 0,0041 g/l to 0,0141 g/l. Therefore, in order to reduce the risk of mudslides on the drip irrigation system in the areas of farms supplied with water from the Amudarya River, their hydraulic calculations were carried out to further improve the optimal parameters of sediments for different conditions.

The calculation of the process of turbid sedimentation in the sediments was carried out by the method of A.G.Khachatryan. The calculation procedure for this method is as follows [8, 9, 13, 14, 15].

The sedimentation curve of the mud in the sediment is determined by the following formula:

$$S_{wo}^T = S_{wo}^o - \Delta S_{wo}^T \quad (1)$$

here: S_{wo} - the ordinate of the sinking curve for a situation where there is no effect of turbulent flow;

ΔS_{wo} - correction for turbulence.

The sinking curve in still water is determined by the following formula:

$$S_{wo}^o = 1 - \frac{1}{w_o} \int_0^{w_o} P_{(w)} \cdot dw \quad (2)$$



Here: w_o - the hydraulic magnitude of the sediment coverage; H_{aver}

\underline{P}_w - turbidity dispersion function.

The coverage of the precipitator is determined by the following formula:

$$w_o = \frac{\mathcal{G} \cdot H_{cp}}{L} \quad (3)$$

Here: \mathcal{G} , H_{aver} - the average speed and depth in the damper, respectively;

L - the length of the settling basin on the selected plot.

The average depth in the settling basin:

$$H_{cp} \quad \frac{\omega}{B} \quad (4)$$

Here: ω - the live cutting surface of the settling basin;

B - The width of the settling basin across the water level.

The distribution of turbidity fractions by size corresponds to Khachatryan law:

$$J = \frac{C}{w} \quad (5)$$

Here: $J < W$ comparative turbidity in hydraulic magnitude;

C - constant distribution of fractions by size.

For the account $P_{2,27}$ and $P_{0,09}$ the ordinate of the fuzzy curve on the fractional content was used, that is 0,05 and 0,01 mm hydraulic size for diameter fractional composition 2,27 and 0,09 mm/s case. In that case,

$$C = \frac{P_{2,27} - P_{0,09}}{\ln \frac{2,27}{0,09}} = 0,31 \cdot (P_{2,27} - P_{0,09}) \quad (6)$$

By defining a constant C The total ordinate curve of the fuzzy fraction composition is determined by the following formula:

$$\underline{P}_w = \underline{P}_{0,09} + C \cdot \ln \frac{w}{0,09} = \underline{P}_{2,27} - C \cdot \ln \frac{2,27}{w} \quad (7)$$

In that case, the ordinates of the sinking curve are determined by the following formula:

$$\begin{aligned} S_{w_o}^o &= 1 - \underline{P}_w + C = 1 - \underline{P}_{2,27} + C \cdot \ln\left(\frac{2,27}{w} + 1\right) = 1 - \underline{P}_{0,09} - C \cdot \ln\left(\frac{w_o}{0,09} - 1\right) = \\ &= S_{2,27}^o + C \cdot \ln \frac{2,27}{w_o} = S_{0,09}^o - C \cdot \ln \frac{w_o}{0,09} = 1 - \underline{P}_{w_o} \end{aligned} \quad (8)$$

The ordinates of the turbidity change curve are as follows:



$$\begin{aligned} \underline{P}_w^o &= \underline{P}_w - C = \underline{P}_{2,27} - C \cdot \left(\ln \frac{2,27}{w} + 1 \right) = 1 - \underline{P}_{0,09} - C \cdot \left(\ln \frac{w}{0,09} - 1 \right) = \\ &= S_{2,27}^o + C \cdot \ln \frac{2,27}{w} = S_{0,09}^o - C \cdot \ln \frac{w}{0,09} \end{aligned} \quad (9)$$

The turbulence correction is as follows:

$$\Delta S_w^T = \underline{P}_{Cr} \cdot S_w^o \quad (10)$$

Here: \underline{P}_{Cr} - comparative critical turbidity.

$$\underline{P}_{Cr} = \frac{\rho_{Cr}}{\rho_o} \quad (11)$$

Here: ρ_{Cr} - critical turbidity.

Critical turbidity Determined by the A.G Khachatryans formula [8, 7]:

$$\rho_{Cr} = \frac{0,2 \cdot u_\epsilon}{C} \cdot \underline{P}_{u,\epsilon} \quad (12)$$

Here: $\underline{P}_{u,\epsilon}$ - the relative composition of the fraction in a given turbidity, in units.

$$\underline{P}_{u,\epsilon} = \underline{P}_{0,09} + C \cdot \ln \frac{u_\epsilon}{0,09} \quad (13)$$

The suspended component of the turbulent pulsation is as follows:

$$u_\epsilon = 0,065 \cdot \frac{n^{0,5} \cdot \mathcal{G}^{0,5} \cdot (\mathcal{G} - 0,05)}{H_{aver}^{0,33}} \quad (14)$$

Here: n - the roughness of the sedimentary core;

\mathcal{G} - average speed in the sump.

(1) and (5) in the cooler w_o we have a calculation formula for determining the sedimentation curve of turbines in turbulent flow.

$$S_{w_o}^T = (1 - \underline{P}_{Cr}) \cdot S_{w_o}^o = \left(1 - \frac{\rho_{Cr}}{\rho_o} \right) \cdot S_{w_o}^o \quad (15)$$

The length of the settling tank is calculated according to the degree of settling of the mud in it (3):

$$L = \frac{\mathcal{G}_{aver} \cdot H_{aver}}{w_o} \quad (16)$$

Here: w_o - the coverage of the settling basin providing a given sinking level.

The coverage of the required settling is determined by the following formula:

$$w_o = e^{\left(\frac{1 - \underline{P}_{0,09} - 1,41 \cdot C}{C} \cdot \frac{S_{w_o}^T}{C \cdot (1 - \rho_{Cr})} \right)} \quad (17)$$

The above method is an effective method for sand and clay sludge. Speed in the settling tank 0,2-0,4 m/s when this method gives satisfactory results.



The following is found for the coagulation state of the sedimentation of sludge in the precipitator:

$$S_w^{TK} = S_{w>0,09}^o + \alpha \cdot S_{w<0,09}^{OK} \quad (18)$$

Here: $S_{w>0,09}^o$ - punctuation rate when the turbidity fraction in the sediment is greater than 0.01 mm;

$S_{w<0,09}^{OK}$ - when the mud fraction is less than 0,01 mm ($w = 0,09s/mm$) degree of silence;

α - a coefficient that takes into account the occurrence of coagulation in the flow. Here speed in the sump $\vartheta_{aver} \leq 0,1m/s$ when $\alpha = 0,85$ equal.

$S_w > 0,09$ the value (2) is determined by the condition as follows:

$$\begin{aligned} S_{w>0,09}^{OK} &= \underline{P}_{w>0,09} - \frac{1}{w} \int_{0,09}^w \underline{P}_w \cdot dw = 1 - \underline{P}_{0,09} - \frac{1}{w} \int_{0,09}^w C \cdot \ln \frac{w}{0,09} \cdot dw = \\ &= 1 - \underline{P}_{0,09} - C \cdot \left(\ln \frac{w}{0,09} - 1 \right) - \frac{C \cdot 0,09}{w} \end{aligned} \quad (19)$$

The first threshold of coagulation is determined as follows:

$$\Pi_1 = \frac{t_1}{H_{aver}} = \frac{500}{H_{aver}}, s/mm \quad (20)$$

Here: H_{aver} - average speed in the silencer, mm;

t_1 - Onset time of sinking intensity, s.

The second threshold of coagulation is determined as follows:

$$\Pi_2 = \Pi_1 + \frac{8}{(\rho_{0,09} \cdot H_{aver})^{0,78}}, s/mm \quad (21)$$

Here: $\rho_{0,09}$ - turbidity that creates muds $w < 0,09 mm/s, kg/m^3$

$$\rho_{0,09} = \rho_o \cdot \underline{P}_{0,09} \quad (22)$$

Here: ρ_o - initial turbidity at the head of the condenser, kg/m^3 .

The subsidence curve in the interval up to the Π_2 coagulated mass is determined as follows:

$$S_{w<0,09}^{OK} = \underline{P}_{0,09} \cdot \left[1 - e^{-K \left(\frac{1}{w} - \Pi_1 \right)} \right] \quad (23)$$

Here: K - empirical coefficient

$$K = 0,15 \cdot (\rho_{0,09} \cdot H_{aver})^{1,3} \quad (24)$$

The total ordinate of the sedimentation curve of muds up to the second threshold of coagulation ($w \geq \frac{1}{\Pi_2}$), (19, 20, 24) is determined by the following formula:

$$\begin{aligned}
 S_W^{TK} &= 1 - \underline{P}_{0,09} - C \cdot \left(\ln \frac{w}{0,09} - 1 + \frac{0,09}{w} \right) + \alpha \cdot \underline{P}_{0,09} [1 - e] \\
 &= 1 - 0,15 \cdot \underline{P}_{0,09} - C \cdot \left(\ln \frac{w}{0,09} - 1 + \frac{0,09}{W} \right) - \frac{0,85 \cdot \underline{P}_{0,09}}{e^{\kappa \left(\frac{1}{w} - \Pi_1 \right)}}
 \end{aligned}
 \tag{25}$$

The effective length of the damper is determined from the following formula:

$$L_p = L_{ef} = 1000 \cdot g_{aver} \cdot H_{aver} \cdot \Pi_2 \tag{26}$$

Discussion. Using the above formulas below, the water consumption from the ditch to the settler $Q=0,3 \text{ m}^3/\text{s}$, turbidity of the water in the ditch: $\rho = 1,5-2,0 \text{ g/l}$ [15, 16, 17], sedative resolution: $b=13 \text{ m}$; $H=2.5 \text{ m}$; $L=30-300 \text{ m}$ is a graph of the relationship between the length of the silencer and the degree of blurred punctuation (Fig.3). In the same way, it is possible to perform calculations in a special Excel program for any water consumption.

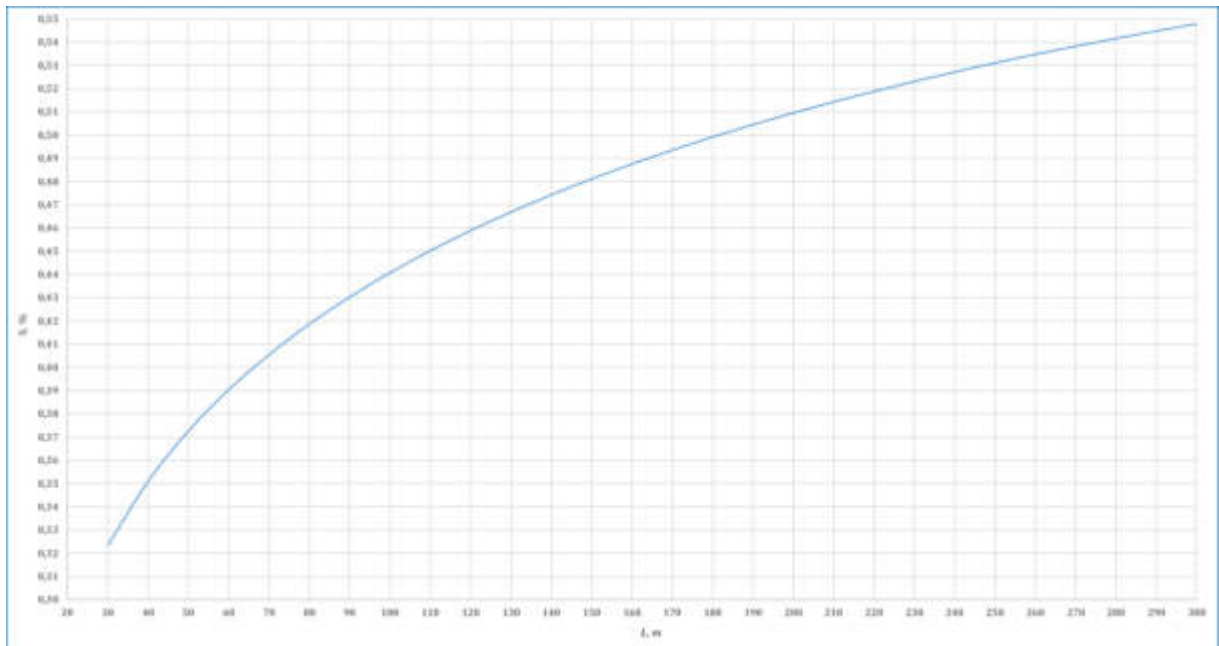


Figure 3. $S_{wOII2} = f(L)$ connection graph.

Conclusion.

1. Experimental analysis shows that the sedimentation rate of turbid sediments from the beginning to the end of the sediments in the conducted experimental sites is from 20% to 40%. If it is assumed that the water from the site canals is constantly flowing into the sediments, then the mud along the length of the built sediments has not yet completely subsided. As a result, during the field irrigation, turbid water was also released from the system filters and pipe drips, i.e., turbidity in the drips ranged from 0.0041 g/l to 0.0141 g/l.
2. Hydraulic calculation of turbid sedimentation process in sediments was performed by A.G.Khachatryan method. As a result, a graph of the relationship between the settling length and the settling rate of the mud in it was developed for different water consumption. As the length of the settling tank increases, the settling rate of the mud increases, i.e., the settling rate of the 41 m long settling tank is 30-40%, while that of the 800 m length is 70-80%.



3. If 20 ha of land is irrigated in 6 plots, then 3.33 ha of land is irrigated in each plot. The water norm required for 1 irrigation of cotton on 3.33 ha of land is 900-950 m³, while the average is 250-300 m³ / ha. If 2 chambers with a length of 10 x 40 m (depth 2-2.5 m) are taken in each chamber, then in the first chamber 35-40% of the distilled water passes into the second chamber, and in 8 hours it becomes another 35-45 % and clear water can be sent to the irrigation system through pumping units. In such cases, water should be constantly supplied to the first chamber from the ditch until the end of 1 irrigation of 20 ha. Subsequent 2, 3 ... n - irrigation is also carried out in the order of the first irrigation.
4. If in some areas there is an excess of land that does not reduce the coefficient of land use, or it is not possible to bring water to the canals on a regular basis during the growing season, then it is advisable to adopt the size of irrigators based on the amount of water per 20 hectares of land. In this case, the dimensions of the settler for 6000 m³ of water can be as follows:
 $b = 15 \text{ m}, h = 2,5 \text{ m}, L = 160 \text{ m}; b = 10 \text{ m}, h = 2,5 \text{ m}, L = 240 \text{ m}.$ Calculations show that in such pits 70-85% of the mud along its length manages to sink.
5. It is advisable to use the above recommendations based on the geographical location of farmland, land use coefficients, periods of water supply of canals during the growing season.
6. These studies are the results of preliminary research conducted on farms in Bukhara region, and in the future it is necessary to conduct further research for other river basins and to further improve the optimal parameters of irrigators for different conditions..

References

1. Law of the Republic of Uzbekistan "On safety of hydraulic structures". Tashkent 1999.
2. Decree of the President of the Republic of Uzbekistan No. PF-4947 of February 7, 2017 "On the Strategy for further development of the Republic of Uzbekistan".
3. Decree of the President of the Republic of Uzbekistan No. PF-6024 of July 10, 2020 "On approval of the Concept of development of water resources of the Republic of Uzbekistan for 2020-2030".
4. Resolution of the President of the Republic of Uzbekistan dated December 27, 2018 No PP-4087 "On urgent measures to create favorable conditions for the widespread use of drip irrigation technology in the cultivation of raw cotton".
5. Khamidov MH, Shukurlaev HI, Mamataliev AB "Hydrotechnical reclamation of agriculture" Tashkent 2008.
6. Gapparov S.M. The dissertation of the Doctor of Philosophy (PhD) in technical sciences "Improvement of drip irrigation technology of cotton planted in double rows under the film". 2021.
7. Qarshiev R.J., Abdukhakimov M.T., Qurbonov Sh.M., Durdiev H.M. Introduction of cost-effective irrigation technologies in water management. Toshkent 2021.
8. Mukhamedzhanov F.Sh. Hydraulic calculation of irrigation sedimentation tanks. Tashkent, 1966.
9. Filippov Yu.G., Khalimbekov J.Sh. Technique for hydraulic calculation of irrigation settling tanks using indicators of sediment settling in calm water. Novocheerkasov 1986.
10. Lapshenkov V.S. et al. Course and diploma design for hydraulic structures. Tutorial. Moscow to Agropromizdat 1989.
11. Bakiev, M., Babajanov, K., Babajanova, N.// Predictive calculations of the bulk water reservoir



- capacity using a geographic information system IOP Conference Series: Materials Science and Engineering, 2020, 883(1), 012008
12. Bakiev, M., Khasanov, K. // Comparison of digital elevation models for determining the area and volume of the water reservoir International Journal of Geoinformatics [this link is disabled](#), 2021, 17(1), pp. 37–45
 13. Yangiev A.A., Panjiev SH., Adjimuratov D.S. // Recommendations for the analysis of safety and assessment of the formation of sludge in flood reservoirs. Journal of Irrigation and Melioration. Tashkent 2021. №1 (23). Pp. 29-33
 14. Yangiev, A., Omarova, G., Yunusova, F., Adjimuratov, D., Risaliev, A.// The study results of the filtration process in the ground dams body and its chemical effect on piezometers/E3S Web of Conferences, 2021, 264, 03014
 15. Projector reference book. Hydraulic structures. Ed. Nedrigi V.P-M Stroyzdot. 1983.
 16. Daneliya N.F. Water intake structures on rivers with abundant bottom sediments. Kolos Publishing House. M., 1964, p. 336.
 17. Mukhammedov A.M. Operation of low-pressure hydroelectric facilities on rivers transport-ing sediments (on the example of Central Asia). Fan. Tashkent, 1976, p. 237.